


DJ CONTROLLER

DDJ-WeGO 3

Hardware Diagram for rekordbox dj

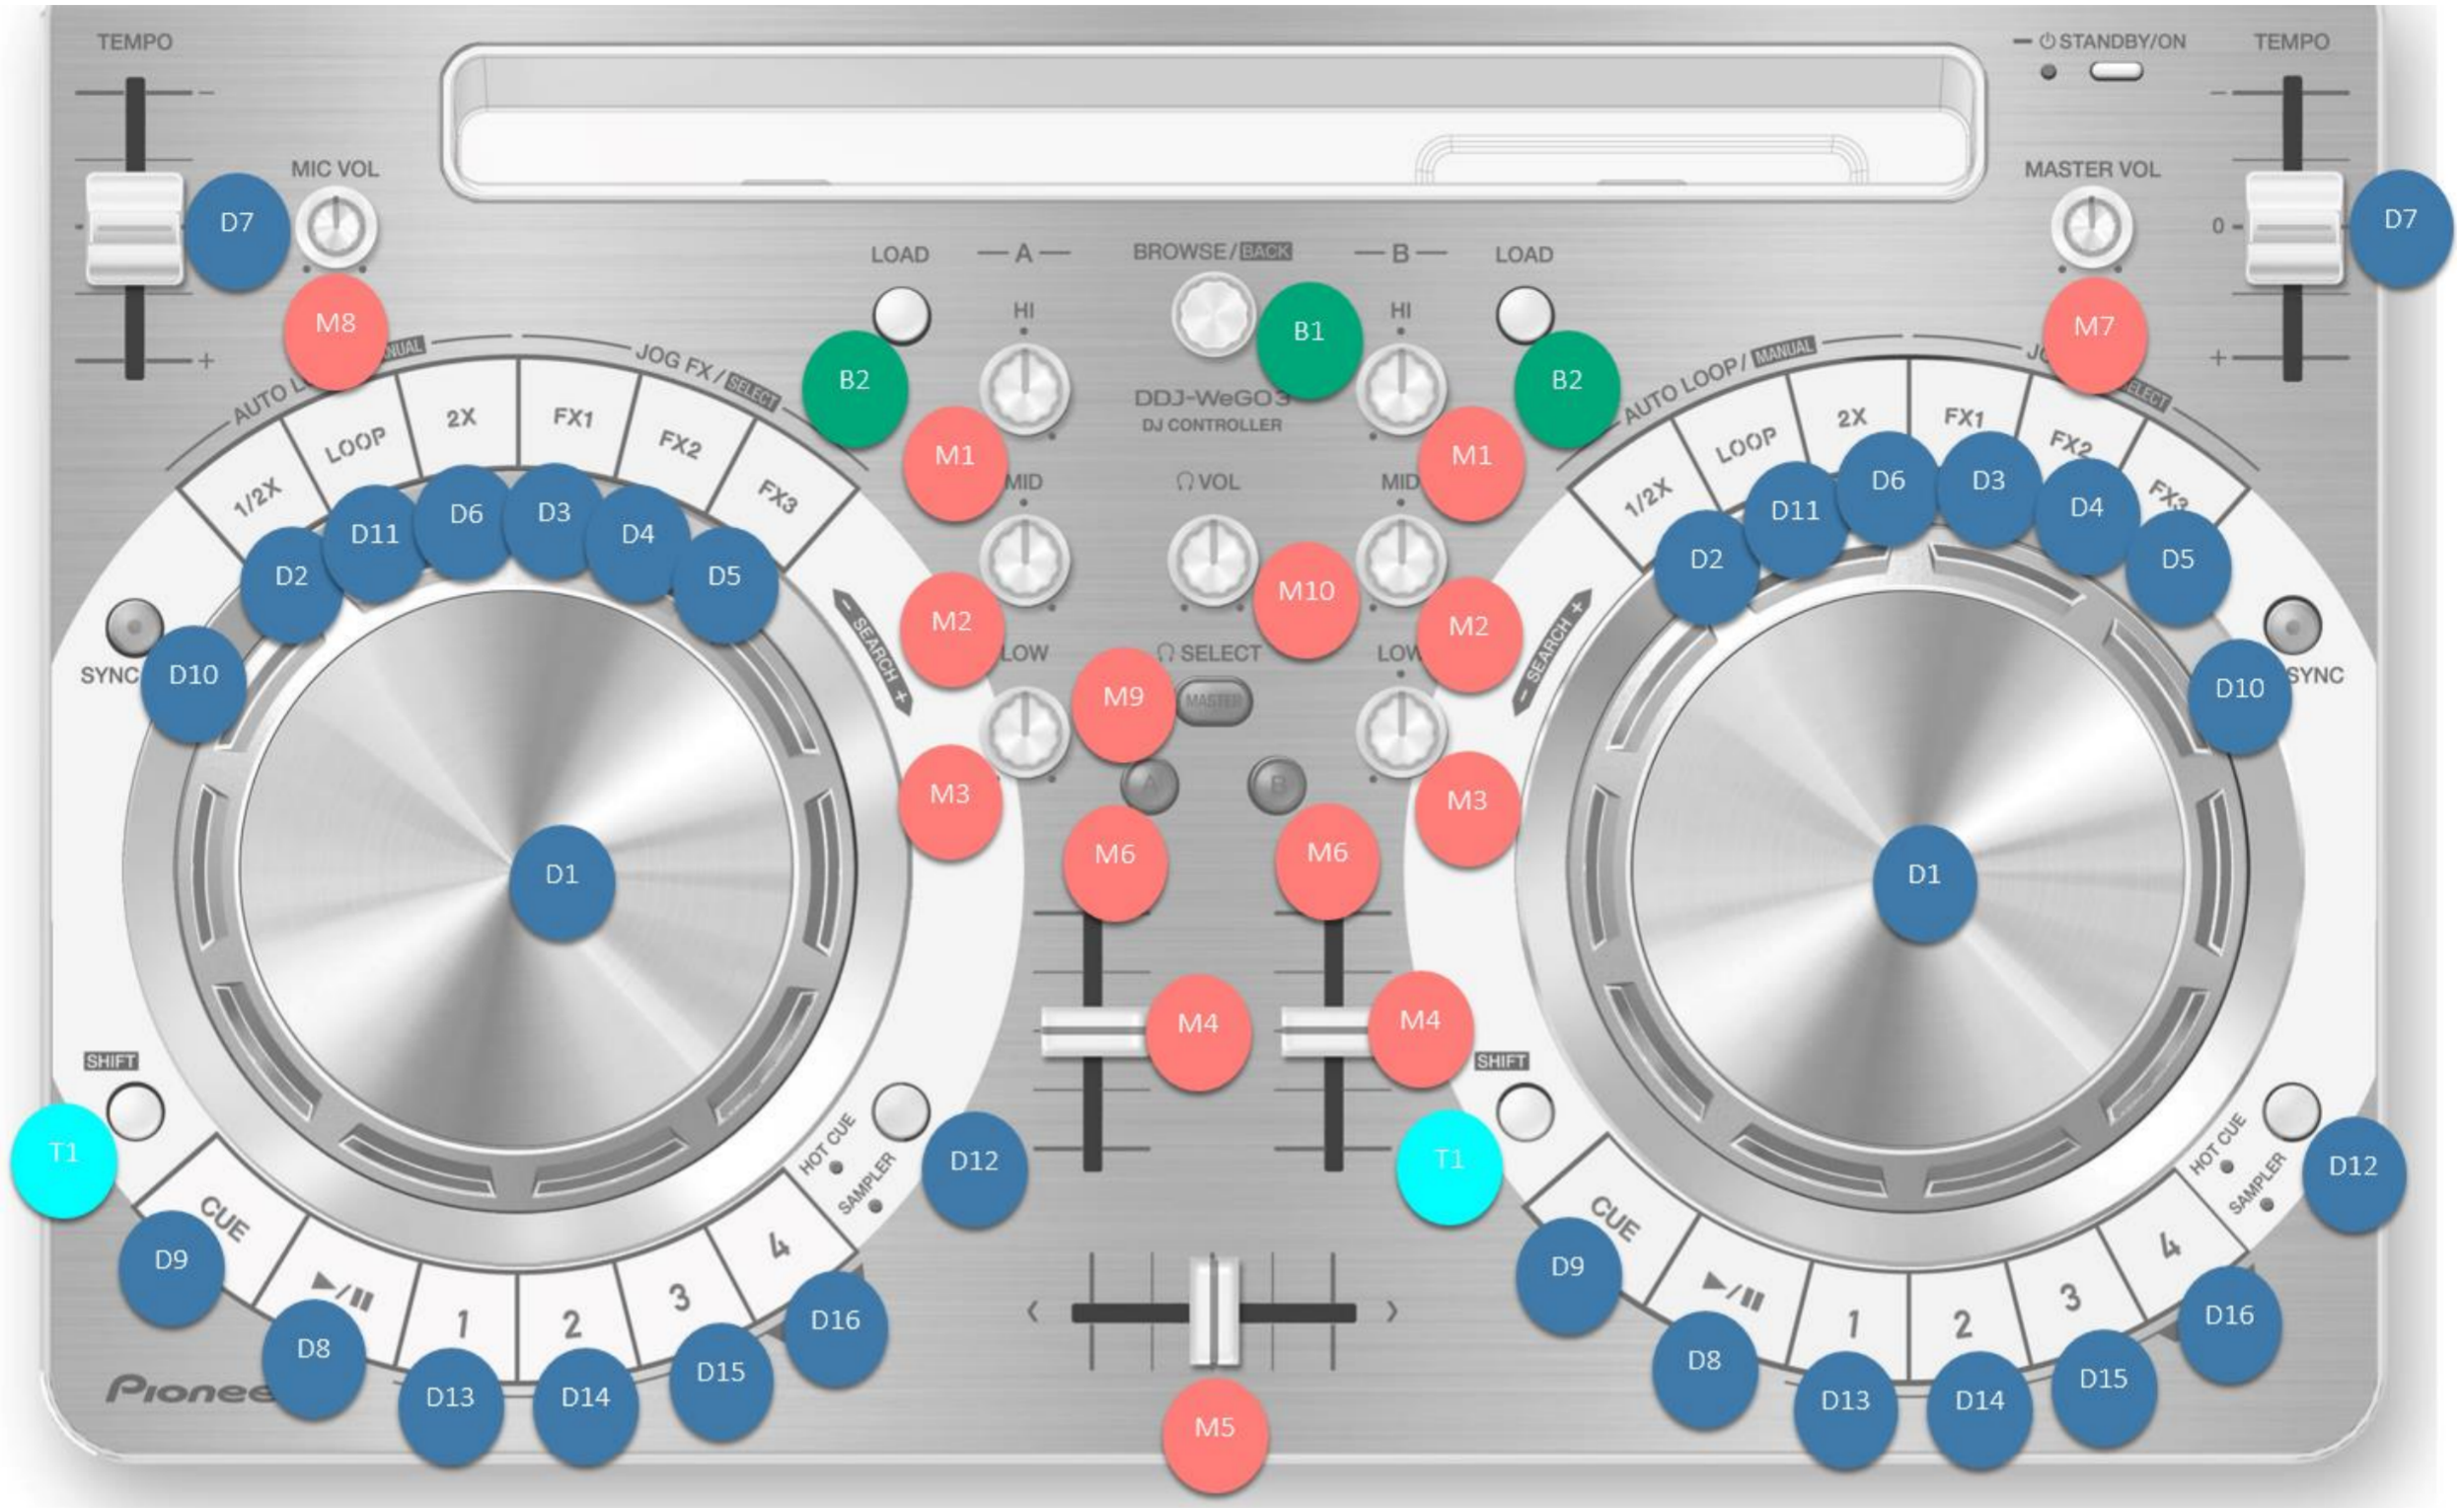

GROUP	No.	NAME	OPERATION	FUNCTION	+SHIFT		
Browse							
	B1	BROWSE	Rotate	Move cursor	Waveform Zoom In/Out		
	B2	LOAD	Push	Open folder/Scroll layer	Close folder/Scroll layer		
					Tag Track / Remove		
Mixer							
	M1	HI	Rotate	EQ (High)	-		
	M2	MID	Rotate	EQ (Mid)	-		
	M3	LOW	Rotate	EQ (Low)	-		
	M4	CH FADER	Slide	Channel fader	-		
	M5	CROSS FADER	Slide	Cross fader	-		
	M6	CUE	Push	Headphones monitor on/off	Tempo Range Control		
	M7	MASTER VOL	Rotate	Master out level	-		
	M8	MIC VOL	Rotate	MIC input level	-		
	M9	MASTER HP CUE	Push	Master headphones monitor on/off	-		
	M10	HEADPHONES VOL	Rotate	Headphones level	-		
Deck							
	D1	JOG	TOP	-	Rotate	Scratch	Search
			SIDE		Rotate	Pitch bend	
		TOP	FX1	Rotate	FX1 Parameter 1		
		SIDE		Rotate	Pitch bend		
		TOP	FX2	Rotate	FX2 Parameter 1		
		SIDE		Rotate	Pitch bend		
		TOP	FX3	Rotate	FX3 Parameter 1		
		SIDE		Rotate	Pitch bend		
	D2	LOOP HALF	LOOP OFF	Push	Loop Half	Manual Loop in	
			LOOP ON	Push	Loop Half	Loop In adjust	
	D3	FX1	Push	JOGFX FX1 Mode On	Select FX1		
	D4	FX2	Push	JOGFX FX2 Mode On	Select FX2		
	D5	FX3	Push	JOGFX FX3 Mode On	Select FX3		
	D6	LOOP DOUBLE	LOOP OFF	Push	Loop Double	Manual Loop Out	
			LOOP ON	Push	Loop Double	Loop Out adjust	
	D7	TEMPO	Slide	Tempo Control	-		
	D8	PLAY/PAUSE	Push	Play/Pause	-		
	D9	CUE	Push	Cue Point/Cue Sampler/Back Cue	Jump to track start		
	D10	SYNC		Push	SYNC On/Off	Master On	
				Push	Auto Loop On	Reloop	
	D11	AUTO LOOP	LOOP OFF	Push	Loop Off	Loop Off	
			LOOP ON	Push	Loop Off	Loop Off	
	D12	SAMPLER	Push	Sampler mode On/Off	-		
	D13	HOT CUE 1		Push	Hot Cue Point 1	Delete Hot Cue Point 1	
			SAMPLER 1	SAMPLER MODE	Push	Sampler 1 Play	Sampler 1 Stop / (Slot is Empty) Load from List
	D14	HOT CUE 2		Push	Hot Cue Point 2	Delete Hot Cue Point 2	
			SAMPLER 2	SAMPLER MODE	Push	Sampler 2 Play	Sampler 2 Stop / (Slot is Empty) Load from List
	D15	HOT CUE 3		Push	Hot Cue Point 3	Delete Hot Cue Point 3	
			SAMPLER 3	SAMPLER MODE	Push	Sampler 3 Play	Sampler 3 Stop / (Slot is Empty) Load from List
	D16	HOT CUE 4		Push	Hot Cue Point 4	Delete Hot Cue Point 4	
			SAMPLER 4	SAMPLER MODE	Push	Sampler 4 Play	Sampler 4 Stop / (Slot is Empty) Load from List
Other							
	T1	SHIFT	Push	Shift	-		

*1 You cannot operate this GUI of rekordbox dj. MIC audio cannot be assigned to rekordbox dj deck.